
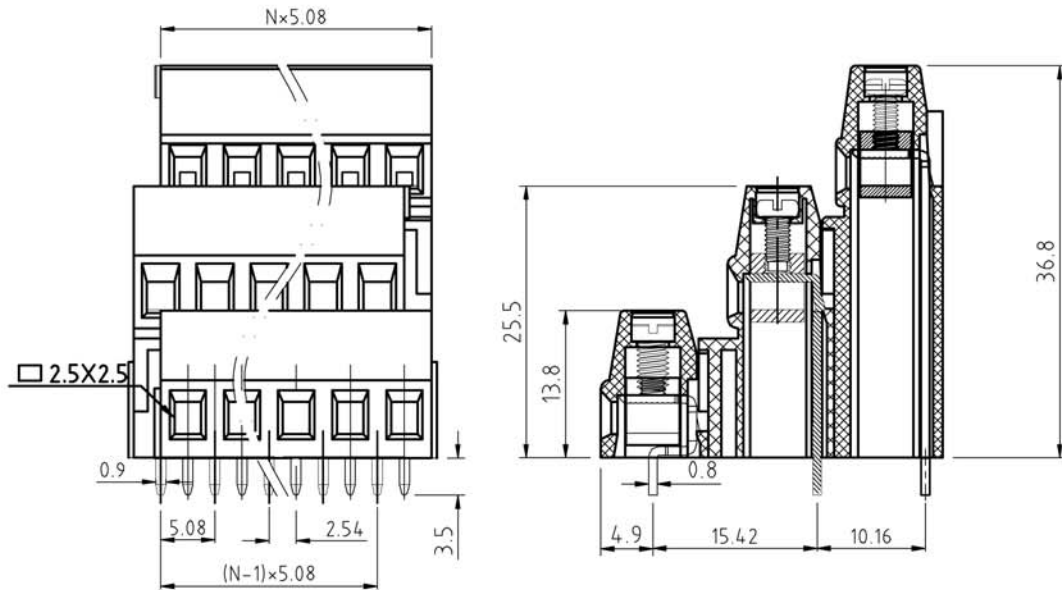


SIGN	DESCRIPTION	DATE	APPROVER

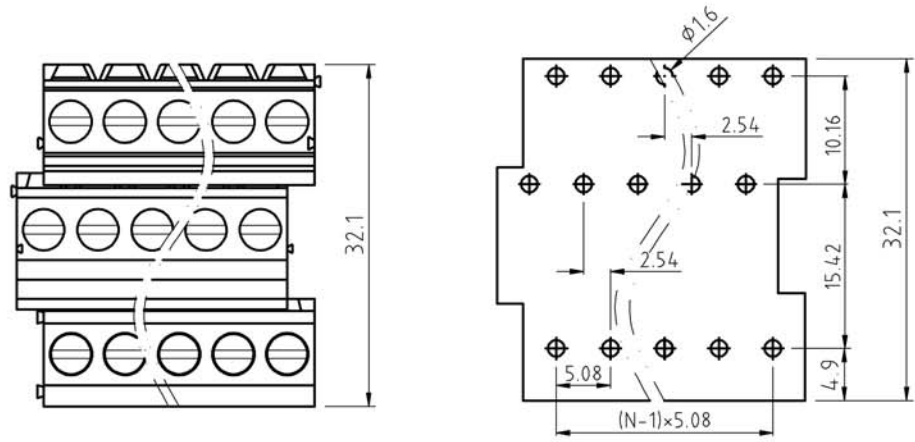

Technical Data:

Material:

Contact(metal housing): Copper Alloy Ni plated  
Terminal screw: Steel galvanized with Cr3+ plated  
Solder Pin: Copper Alloy with Tin plated  
Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC  
Current rating: 16 Amps/way max  
Contact resistance: 20mΩ(max)  
Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
Wire range: 12-30AWG

Mechanical:

Torque: 4.5kgf.cm/M2.5  
Operating temperature: -40°C to +105°C  
Soldering reliability:  
Test temperature= 250°C±10°C  
5 seconds max

Ordering Information:

F35 - W - E XX - X 0 1 X 0

2	02	5	Green
-	-	6	Blue
24	24	8	Grey
1	"-" SCREW	A	Black
2	"-/" SCREW		

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME:
X: ±0.50	CHECKED:	F35-W Pitch5.08mm
X.X: ±0.30	DRAWN: Ling Yu 2013,05,07	series
X.XX: ±0.20	UNITS: mm	PART NO: F35WEXX101X0
X°: ±1°	REV: A	DWG NO: 9F35WE011A
SCALE: 2/1	PAGE: 1/1	