
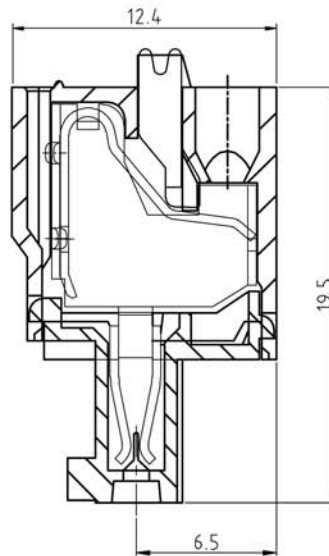


N=Number of contacts

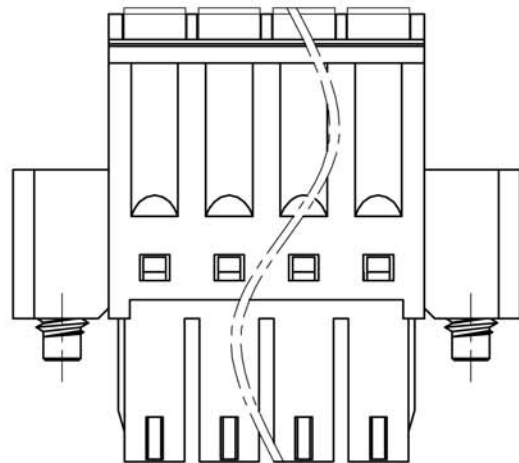

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Terminal: Copper Alloy, Tin plated.
 Wire guard: Copper Alloy
 Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC
 Current rating: 12 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 16-24AWG

Mechanical:

Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

Ordering Information:

F73 - 1 - 3 XX - X 0 0 X 0

2 02 | 5 Green
 - | 6 Blue
 24 24 | 8 Grey
 | A Black

1 "-" SCREW
 2 "-/+" SCREW

WELINK 上海拓尔普电子科技有限公司
 Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X ±0.50	CHECKED:	F73 - 1 - pitch 3.5 mm
X.X ±0.30	DRAWN: Yang Ming 2012,06,20	- series
X.XX ±0.20	UNITS: mm	PART NO: F7313XXX00X0
X° ±1°	REV: A	DWG NO: 9F7313001A
⊕	SCALE: 4 / 1	PAGE: 1 / 1