

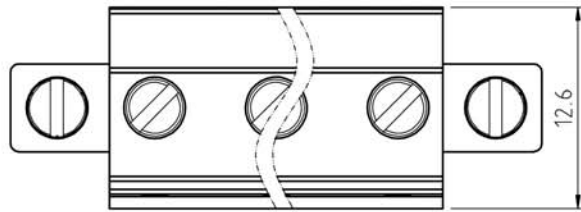
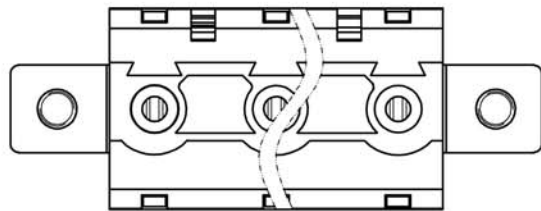


SIGN	DESCRIPTION	DATE	APPROVER

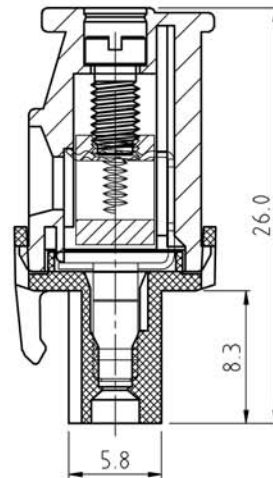

N=Number of contacts

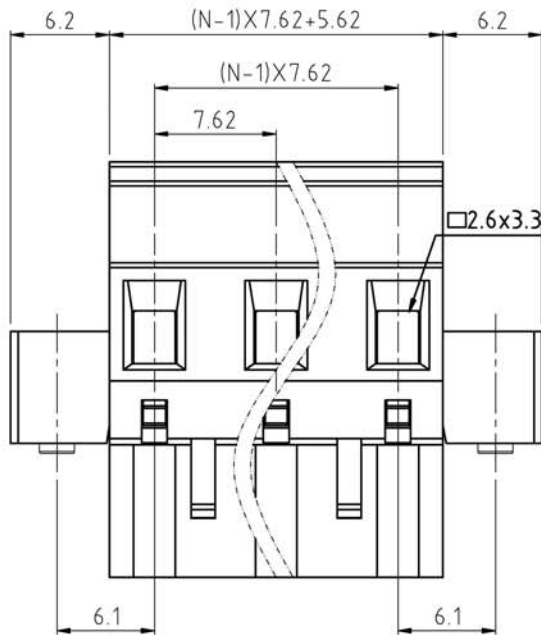

Technical Data:

Material:

Contact(metal housing): Copper Alloy with Ni plated
 Terminal screw: Steel galvanized with Cr3+ plated
 Solder Pin: Copper Alloy with Tin plated
 Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC
 Current rating: 16 Amps/way max
 Contact resistance: 20mΩ (max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 12-26AWG

Mechanical:

Torque: 5.0kg.cm/M3
 Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

Ordering Information:

F75-C-G XX-X 0 0 X 0

- 2 02
- -
- 24 24
- 1 "-" SCREW
- 2 "-/+ " SCREW
- 5 GREEN
- 6 BLUE

WELINK 上海拓尔普电子科技有限公司
 Welink International Co.,LTD.

TOLERANCE	APPROVED:	NAME: F75-C Pitch 7.62mm
X ±0.50	CHECKED:	-series
X.X ±0.30	DRAWN: Yang Ming 2012,06,20	
X.XX ±0.20	UNITS: mm	PART NO: F75CGXX100X0
X° ±1°	REV: A	DWG NO: 9F75CG001A
⊕	SCALE: 3 / 1	PAGE: 1 / 1