
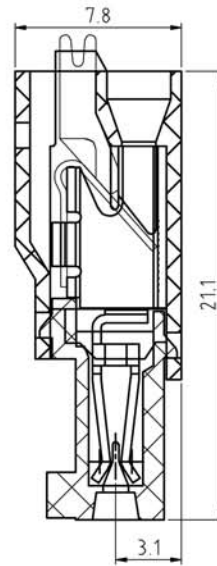
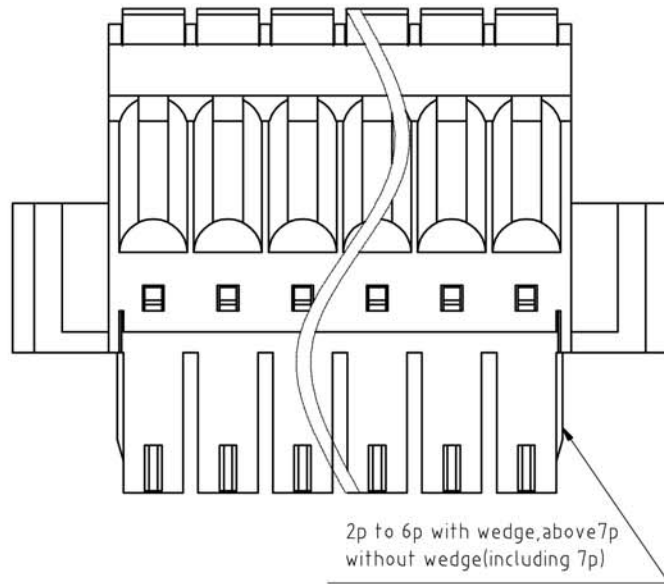


SIGN	DESCRIPTION	DATE	APPROVER

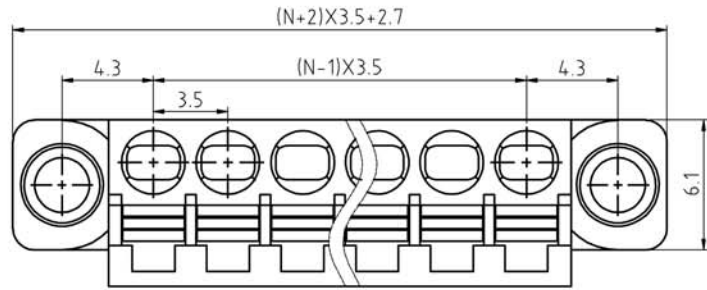

Technical Data:

Material:

terminal: Copper Alloy with Tin plated
 Spring Clamp: Stainless steel
 Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC
 Current rating: 12 Amps/way max
 Contact resistance: 20mΩ(max)
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
 Wire range: 16-24AWG

Mechanical:

Operating temperature: -40°C to +105°C
 Soldering reliability:
 Test temperature= 250°C±10°C
 5 seconds max

Ordering Information:

F73 - K - 3 XX - 0 0 0 X 0

2	02	5	Green
-	-	6	Blue
24	24	8	Grey
		A	Black

WELINK 上海拓尔普电子科技有限公司
 Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X: ±0.50	CHECKED:	F73 - K - pitch 3.5mm
X.X: ±0.30	DRAWN: Yang Ming 2012.03.23	- series
X.XX: ±0.20	UNITS: mm	PART NO: F73K3XX000X0
X°: ±1°	REV: A	DWG NO: 9F73K3001A
SCALE: 4 / 1	PAGE: 1 / 1	