
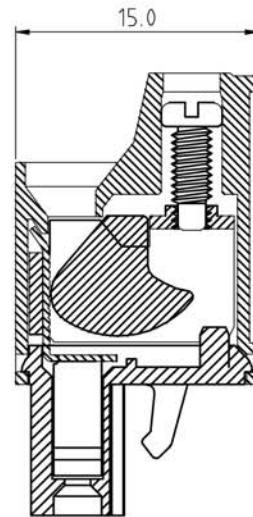


N=Number of contacts

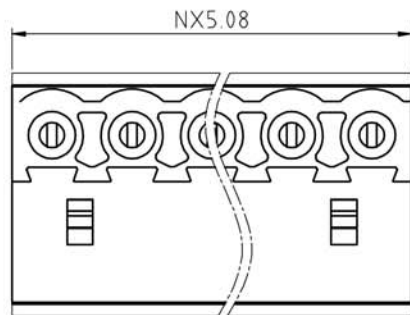

SIGN	DESCRIPTION	DATE	APPROVER

Technical Data:

Material:

Contact(metal housing): Copper Alloy with Ni plated  
 Terminal screw: Steel galvanized with Cr3+ plated  
 Wire guard: Copper Alloy Tin plated.  
 Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC  
 Current rating: 16 Amps/way max  
 Contact resistance: 20mΩ(max)  
 Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs  
 Wire range: 12-26AWG

Mechanical:

Torque: 4kgf.cm/M2.5  
 Operating temperature: -40°C to +105°C  
 Soldering reliability:  
 Test temperature= 250°C±10°C  
 5 seconds max

Ordering Information:

F75 - 7 - E XX - X 0 0 X 0

2 02

24 24

5 Green  
 6 Blue  
 8 Grey  
 A Black

1 "-" SCREW  
 2 "-/+" SCREW

**WELINK** 上海拓尔普电子科技有限公司  
 Welink International Co.,LTD.

TOLERANCE X ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: F75 - 7 - pitch 5.08mm - series
	CHECKED:	
	DRAWN: Yang Ming 2012.06.20	
	UNITS: mm	REV: A
	SCALE: 3 / 1	PAGE: 1 / 1
		PART NO: F757EXX100X0
		DWG NO: 9F757E001B