
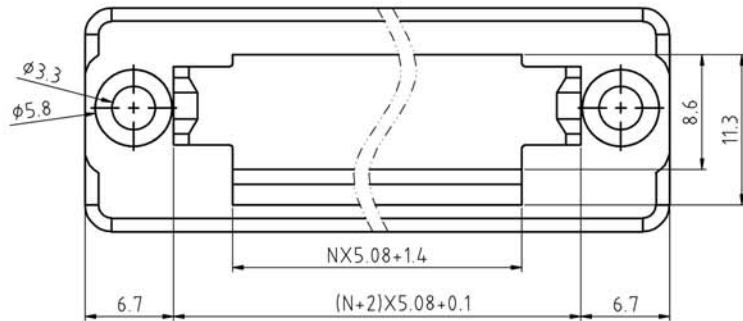




SIGN	DESCRIPTION	DATE	APPROVER

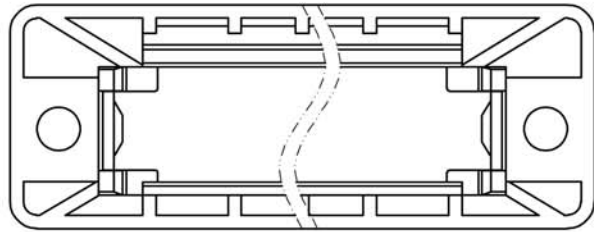

N=Number of contacts

Technical Data:

Material:

Insulator body(housing): Polyamide(UL94V-0)

Electrical

Voltage rating: 300VAC

Current rating: 16 Amps/way max

Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

Operating temperature: -40°C to +105°C

Soldering reliability:

Test temperature= 250°C±10°C

5 seconds max

Ordering Information:

F7A-2-E XX-0 0 0 X 0

2 02
- -
24 24

- 5 Green
- 6 Blue
- 8 Grey
- A Black

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X ±0.30	CHECKED:	F7A-2 Pitch 5.08mm
X.X ±0.15	DRAWN: Yang Ming 2012,06,20	-Bracket
X.XX ±0.05	UNITS: mm	REV: A
X° ±1°	SCALE: 2.5 / 1	PAGE: 1 / 1
		PART NO: F7A2EXX000X0
		DWG NO: 9F7A2E001A