

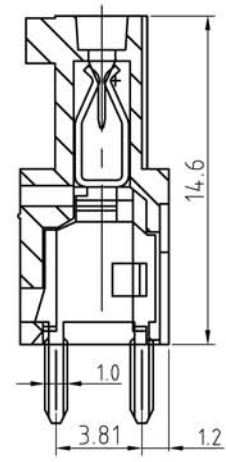



SIGN	DESCRIPTION	DATE	APPROVER

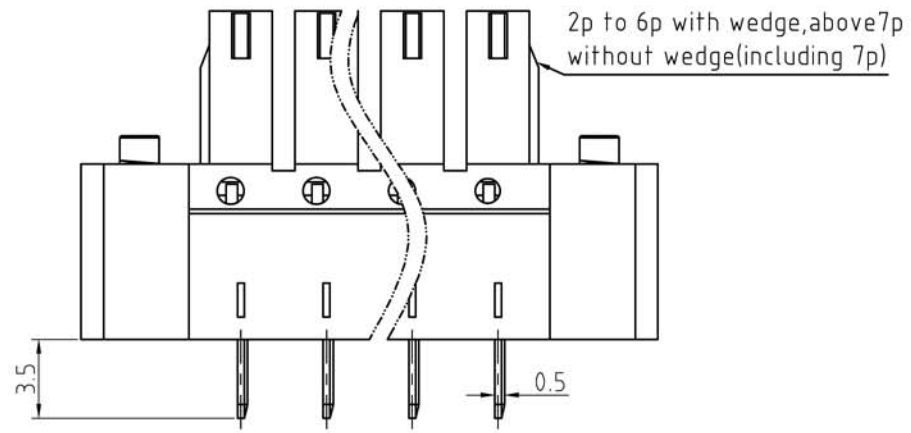

N=Number of contacts

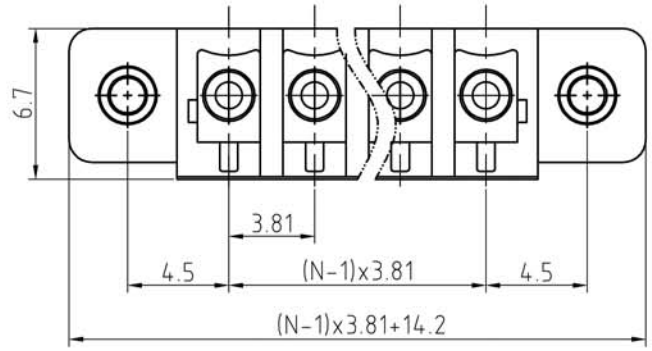

P.C.B. LAYOUT

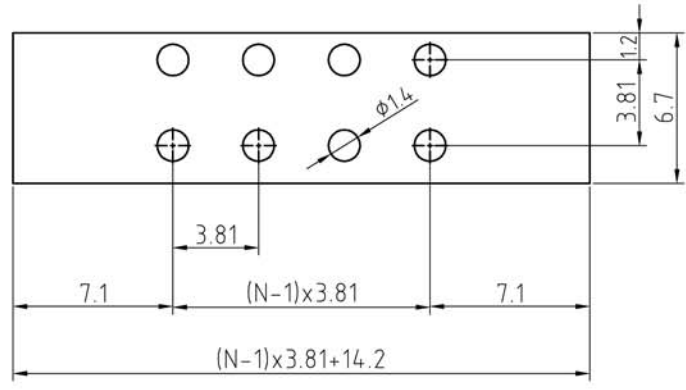

Technical Data:

Material:

- Solder Pin: Copper Alloy with Tin plated
- Terminal screw: Steel galvanized with Cr3+ plated
- Insulator body(housing): Polyamide(UL94V-0)

Electrical


- Voltage rating: 300VAC
- Current rating: 12 Amps/way max
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering reliability: Test temperature= 250°C±10°C
- 5 seconds max

Ordering Information:

F73 - Q - C XX - X 0 0 X 0

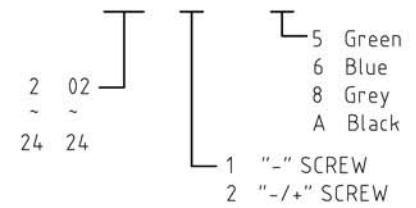

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED: CHECKED: DRAWN: Yang Ming 2012,06,20	NAME: F73 - Q - pitch 3.81mm - series
UNITS: mm	REV: A	PART NO: F73QCXX000X0
SCALE: 4 / 1	PAGE: 1 / 1	DWG NO: 9F73QC001A