
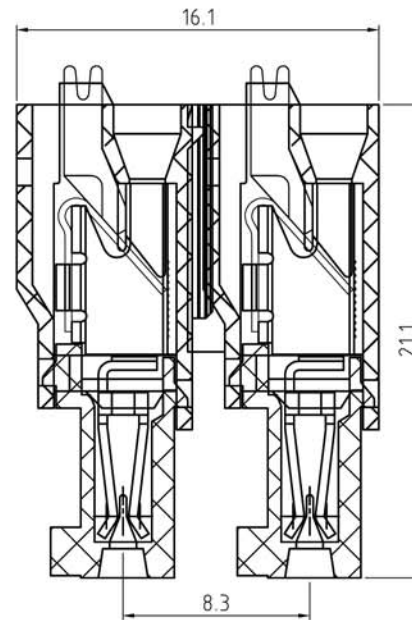
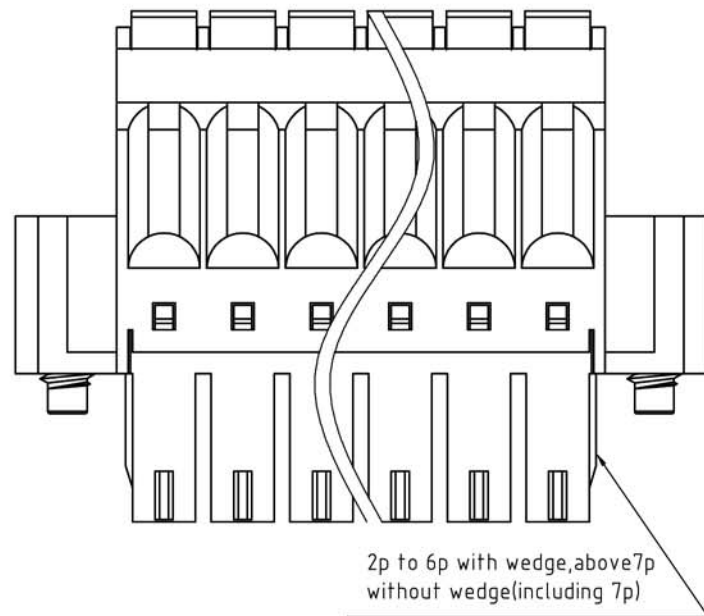


SIGN	DESCRIPTION	DATE	APPROVER

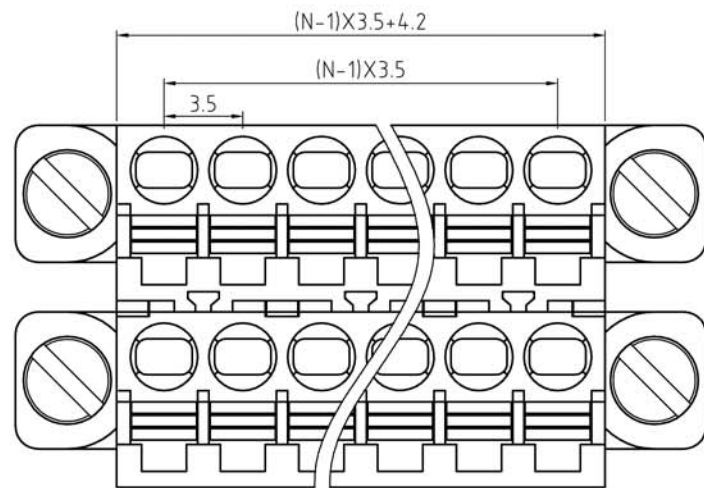

2p to 6p with wedge, above 7p without wedge (including 7p)

N=Number of contacts

Technical Data:

Material:

- terminal: Copper Alloy with Tin plated
- Spring Clamp: Stainless steel
- Insulator body(housing): Polyamide(UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 12 Amps/way max
- Contact resistance: 20mΩ(max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-24AWG

Mechanical:

- Operating temperature: -40°C to +105°C
- Soldering reliability:
  - Test temperature= 250°C±10°C
  - 5 seconds max

Ordering Information:

F73 - V - 3 XX - 0 0 1 X 0 000

- 2 02
- ~ ~
- 24 24
- 5 Green
- 6 Blue
- 8 Grey
- A Black

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED:	NAME: F73 - V - pitch 3.5mm - series 有耳螺絲
	CHECKED:	
	DRAWN: Ling Yu 2017.11.08	
	UNITS: mm	REV: A
	SCALE: 4 / 1	PAGE: 1 / 1
		PART NO: F73V3XX001X0000
		DWG NO: 9F73V3101A