



SIGN	DESCRIPTION	DATE	APPROVER

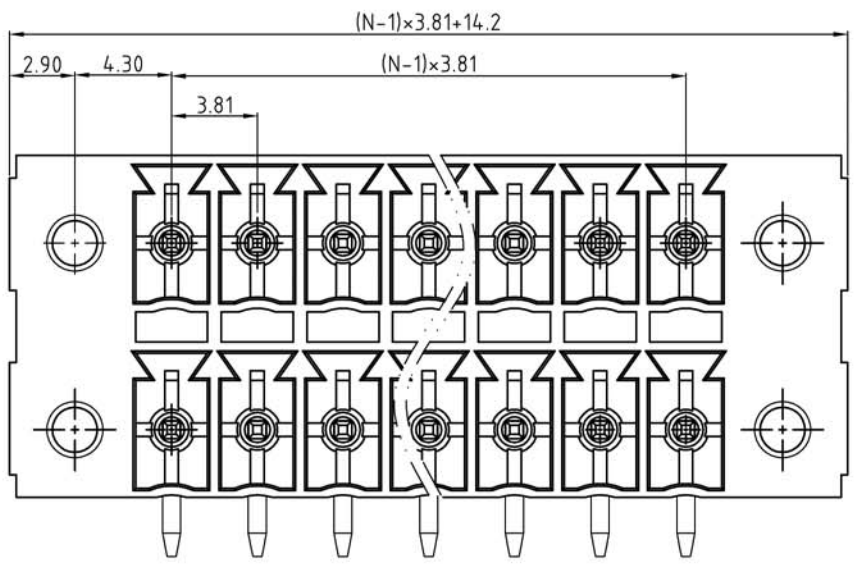


N=Number of contacts

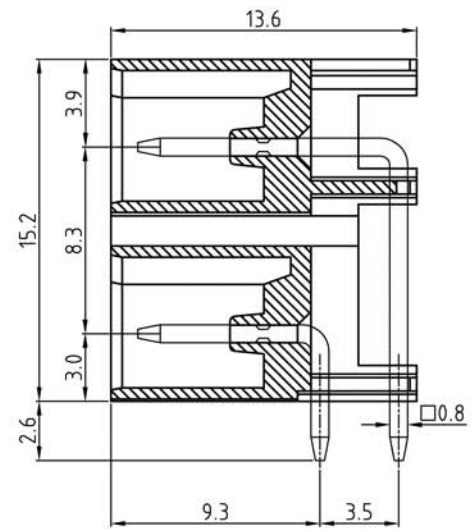

Technical Data:
 Material:
 Solder Pin: Copper Alloy Tin plated
 Insulator body(housing): Polyamide (Glass filled)(UL94V-0)
 Electrical
 Voltage rating: 300VAC
 Current rating: 12A
 Withstanding Voltage: AC 2500V(1min)
 Mechanical:
 Using temperature Range: -40°C to +105°C
 Soldering temperature:+250°C,5seconds Max.
 Ordering Information:
F83-U-C XX-0 0 0 X 0 0 0 1

02	2Pin	5	Green
To	To	6	Blue
24	24Pin	A	Black

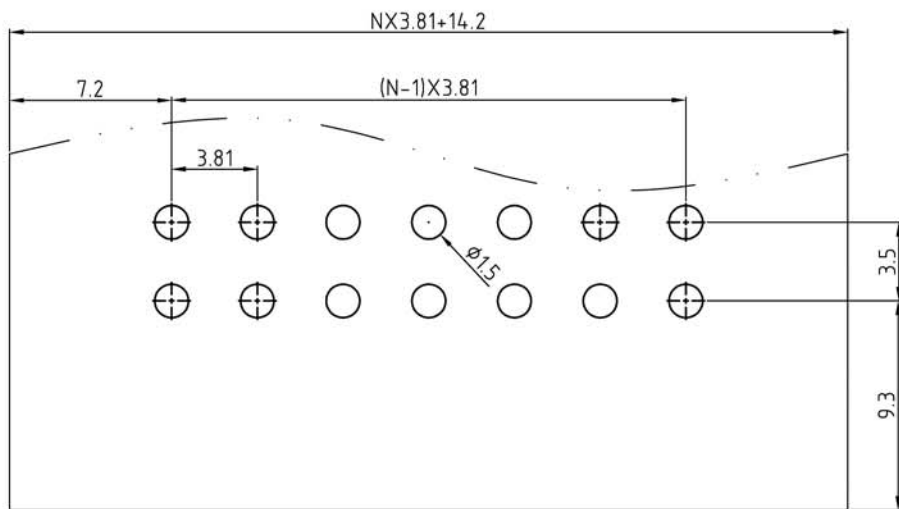

PCB. LAYOUT

WELINK 上海拓尔普电子科技有限公司
 Welink International Co., LTD.

TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1°	APPROVED: CHECKED: DRAWN: LingYu 2016,07,01	NAME: F83-U Pitch 3.81mm -Series方块螺母
UNITS: mm	REV: A	PART NO: F83UCXX000X0001
SCALE: 4 / 1	PAGE: 1 / 1	DWG NO: 9F83UC101A