

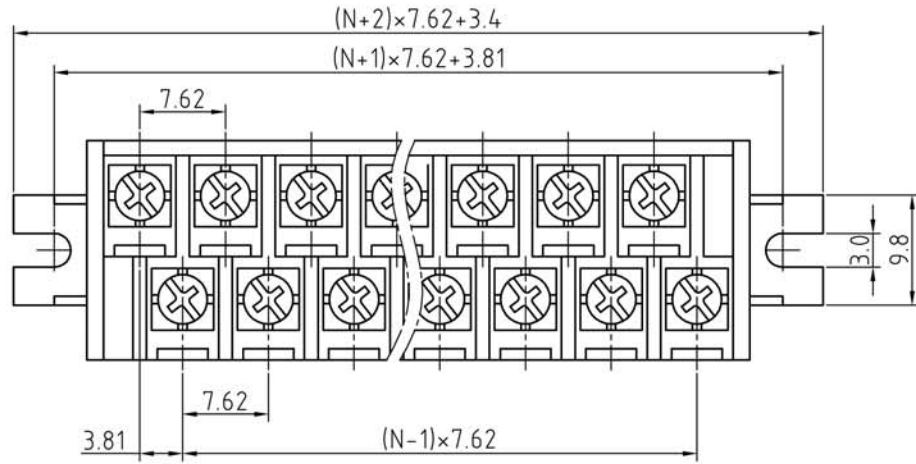


| SIGN | DESCRIPTION | DATE | APPROVER |
|------|-------------|------------|----------|
| △ | | 0000,00,00 | ---- |

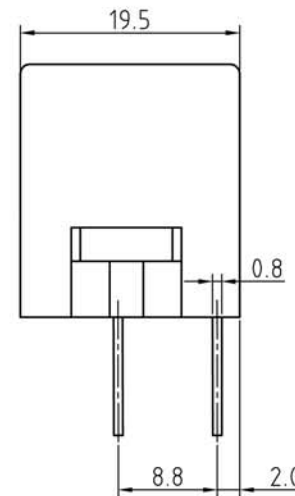

N=Number of contacts

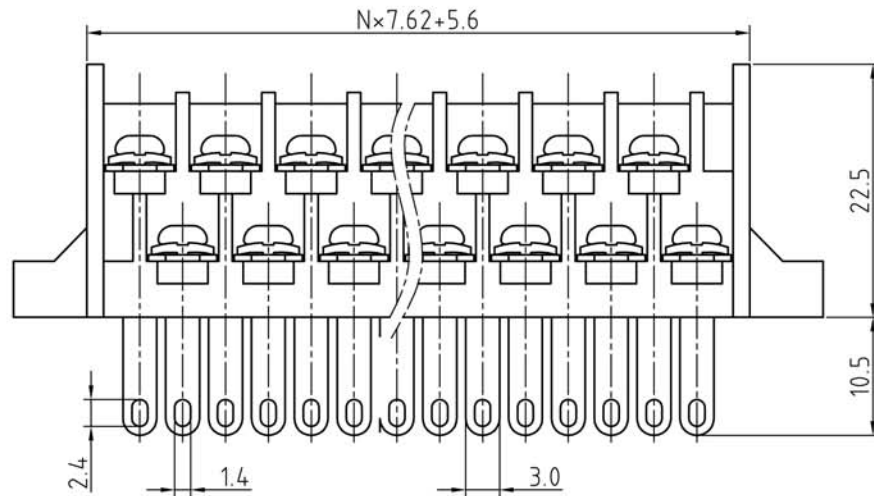

SPECIFICATIONS:

- 1.Barrier Material: P.B.T UL 94V-0 Black
- 2.Terminals:Brass 0.8t Gold or Tin Plated
- 3.Screws: Steel M3.0 Gold or Nickel or Cr³⁺ Plated
- 4.Screw Torque Value: 6Kg/cm
- 5.Wire Range AWG:22-16 STR
- 6.Rating:15Amperes 250V
- 7.Insulation Resistance more at DC500V
- 8.Using Temperature Rang:-40°C~+105°C
- 9.Insulation Withstands Voltage:2000V/min
- 10.Available in Multipoles 2P-32P

×Amounting End & Barrier End Are Both Available

U575 - 4 - G XX - X X X 4

- A Black
- 1 Auricled
- 2 Earless
- 1 "-"Screw Cr³⁺
- 2 "-/+"Screw Cr³⁺
- 3 "-"Screw Ni Plated
- 4 "-/+"Screw Ni Plated
- 02 2Pin
- To To
- 32 32Pin

WELINK 上海拓尔普电子科技有限公司
Welink International Co., LTD.

| | | | |
|--|-------------------------|----------------------------------|-----------------------|
| TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.20 X° ±1° | APPROVED: | NAME: U575-4 Pitch 7.62mm series | |
| | CHECKED: | | |
| | DRAWN: JIMMY 2009,01,02 | | |
| | UNITS: mm | REV: A | PART NO: U5754GXXX1A4 |
| | SCALE: 2 / 1 | PAGE: 1 / 1 | DWG NO: 9U5754401A |