


SIGN	DESCRIPTION	DATE	APPROVER

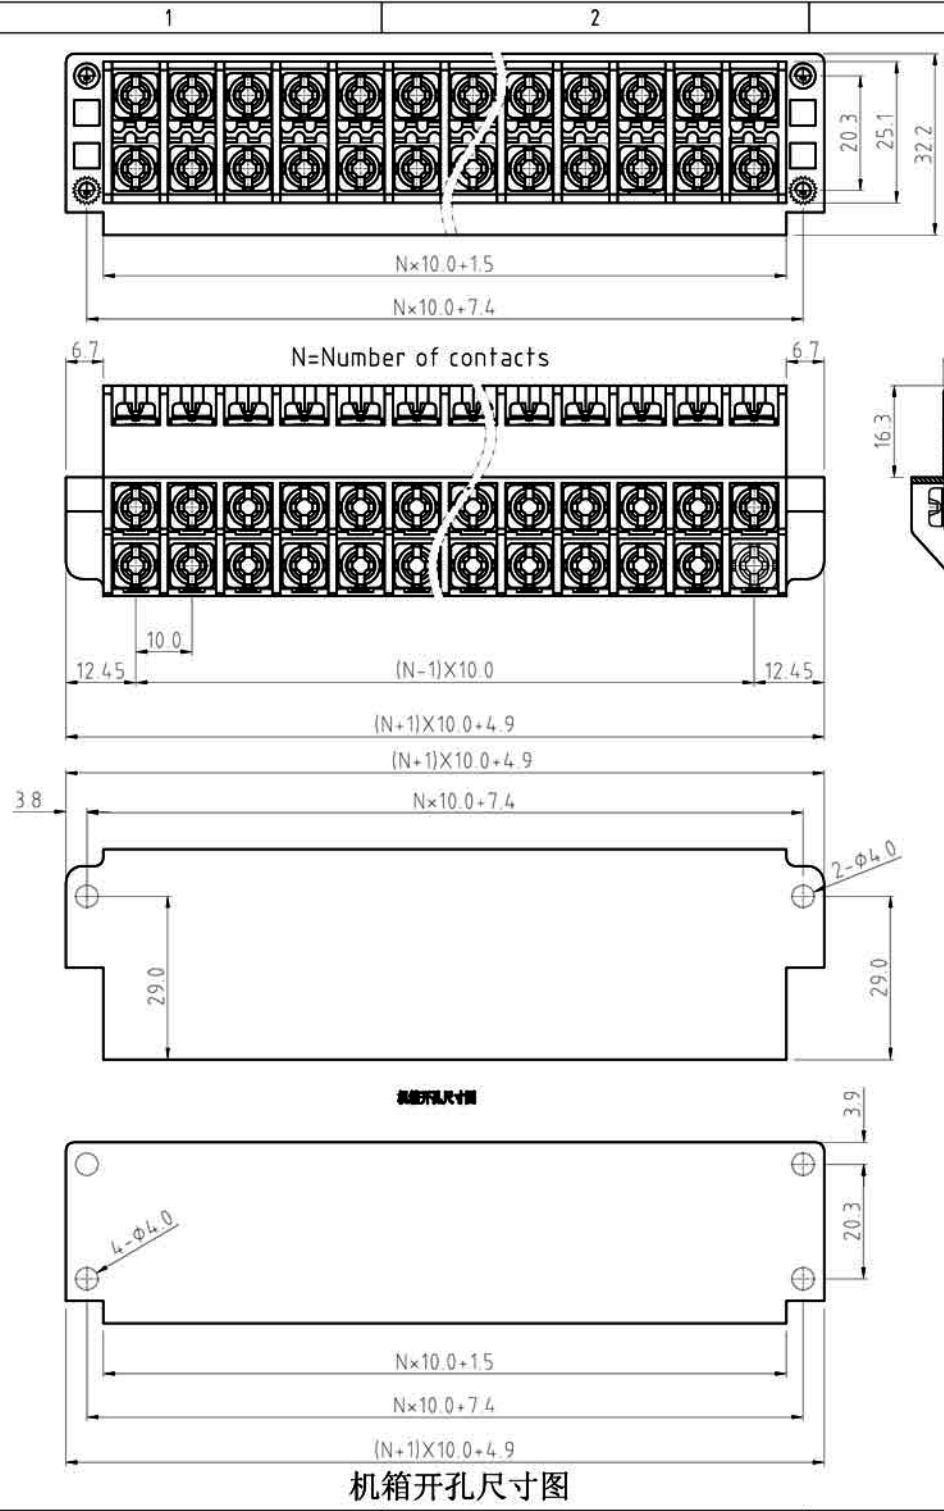

**Technical Data:**

**Material:**

- Terminals: Copper Alloy Tin plated
- Terminal screw: Steel galvanized with Cr3+ plated
- Nut: steel galvanized with Cr3+ plated
- Ear clip nut: Copper Alloy with Ni plated
- Insulator body(housing): PC (Glass filled)

**Electrical**

- Voltage rating: 250VAC
- Current rating: 15 Amps/way max
- Contact resistance: 20m Ω (max)
- Withstanding Voltage: 2500VAC(1min) Test time=60sec/1pcs
- Wire range: 16-22AWG

**Mechanical:**

- Torque: 6kgf.cm/M4
- Operating temperature: -40°C to +105°C
- Soldering reliability: Test temperature= 250°C±10°C 5 seconds max

**Ordering Information:**

U575 - B - J XX - X 0 X 0

- 02 2Pin
- To To
- 26 26Pin
- 5 Green
- 6 Blue
- 8 Grey
- A Black
- 0 Plastics have pinhole
- 1 Plastic has no pinhole

- 1 "-"Screw Cr<sup>3+</sup>
- 2 "-/+ "Screw Cr<sup>3+</sup>
- 3 "-"Screw Ni Plated
- 4 "-/+ "Screw Ni Plated

**WELINK** 上海拓尔普电子科技有限公司  
Welink International Co., LTD.

TOLERANCE	APPROVED:	NAME:
X: ±0.50	CHECKED:	U575-B Pitch-10.0mm
X.X: ±0.30	DRAWN: YangMing 2013.08.22	-Plastics have pinhole series
X.XX: ±0.20	UNITS: mm	PART NO: U575BJXX20X0
X°: ±#	SCALE: 1/1	DWG NO: 9U575BJ01A
	REV: A	
	PAGE: 1/1	

机箱开孔尺寸图